





PLEASE READ THE STEPS BELOW BEFORE COMMENCING ANY ASSEMBLY

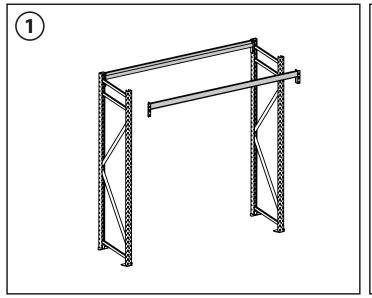

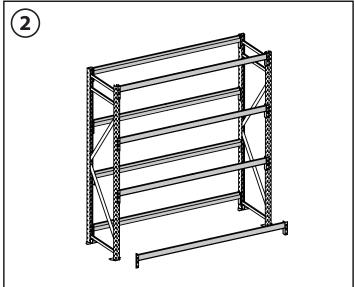

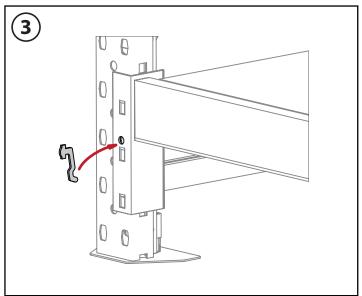


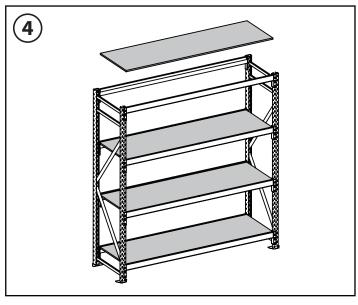

5 retail	THIS DOCUMENT M AY NOT BE SHOWN OR REPRODUCED BY	ASSEMBLY INSTRUCTIONS	DRAWN BY: SI RETAIL	SHEET: 1/1
	ANY OTHER PARTY WITHOUT PRIOR WRITTEN CONSENT	TITLE:	FILE NAME:	REVISION:
SOLUTIONS IN RETAIL	FROM SI RETAIL Pty Ltd. Copyright.	LONGSPAN SHELVING SYSTEM	LS-XX-XXXX	Α

Longspan Shelving Safety Guide








NEVER PLACE ANY CORROSIVE CHEMICALS ON THE RACKING

Ensure correct load placement

NEVER OVERLOAD THE LONGSPAN SHELVING

EVERYTHING NEEDS TO BE HAND LOADED AND UNLOADED (NO FORKLIFT IS TO BE USED)


DO NOT STORE AN UNBALANCED LOAD



INCORRECT

Heavy Loads where possible must be evenly distributed across the shelf level.


ALWAYS DISTRIBUTE LOADS EVENLY



CORRECT

Good loading practice. Evenly distributed load and effective use of space.


AVOID STORING LOAD IN THE MIDDLE OF BEAMS



NOT RECOMMENDED


Try to avoid placing heavy items in the middle where possible.

DO NOT OVERLOAD



INCORRECT

Overloaded. Beams designed for 500 kg per shelf. Always check shelf capacity.

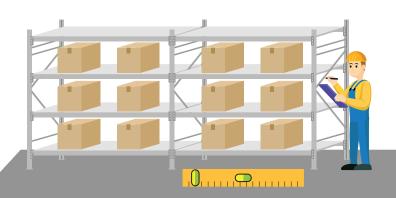

ENSURE THE SHELVING IS ALWAYS ASSEMBLED ON A LEVEL SURFACE.

CORRECT